

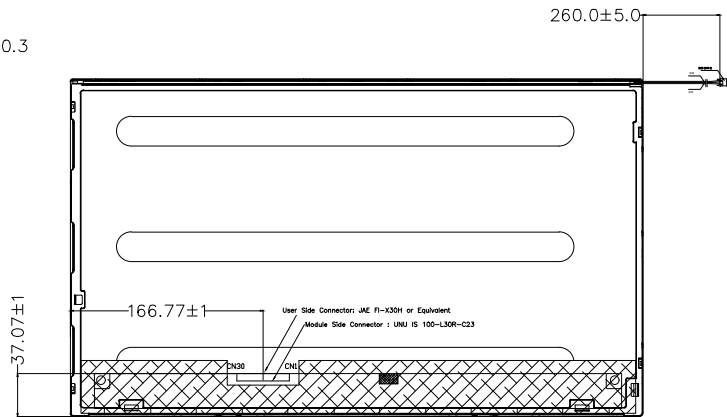
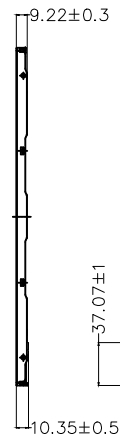
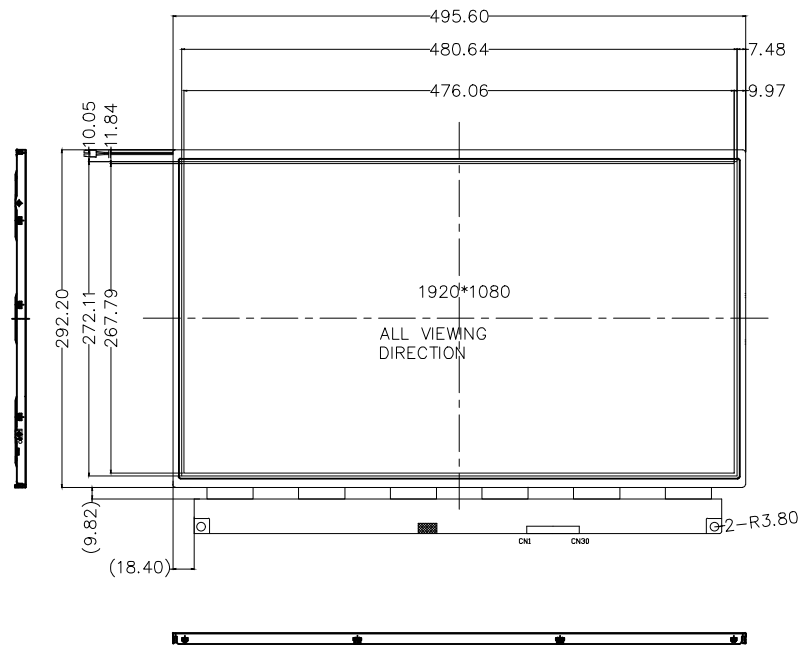




PIN DESCRIPTION

| Pin | Symbol |
|-----|--------|
| 1   | RX00-  |
| 2   | RX00+  |
| 3   | RX01-  |
| 4   | RX01+  |
| 5   | RX02-  |
| 6   | RX02+  |
| 7   | BIST   |
| 8   | RXOC-  |
| 9   | RXOC+  |
| 10  | RX03-  |
| 11  | RX03+  |
| 12  | RXE0-  |
| 13  | RXE0+  |
| 14  | GND    |
| 15  | RXE1-  |
| 16  | RXE1+  |
| 17  | GND    |
| 18  | RXE2-  |
| 19  | RXE2+  |
| 20  | RXEC-  |
| 21  | RXEC+  |
| 22  | RXE3-  |
| 23  | RXE3+  |
| 24  | GND    |
| 25  | CTL    |
| 26  | CE     |
| 27  | NC     |
| 28  | VDD    |
| 29  | VDD    |
| 30  | VDD    |



|                       |                         |
|-----------------------|-------------------------|
| Display Type          | 21.5" TFT, TRANSMISSIVE |
| Upper Polarizal Type  | NORMALLY BLACK          |
| Viewing Angle         | ANTI-GLARE              |
| LCD Driver IC         | ALL VIEW                |
| Logic Voltage         | TBD                     |
| Operation Temperature | VDD=5V                  |
| Storage Temperature   | 0°C TO 50°C             |
| Interface             | -20°C TO 60°C           |
| Backlight             | LVDS                    |
| Surface luminance     | 60-LED WHITE            |
| White X/Y             | 500cd/m2(TYP.)          |

NOTES:  
1. GENERAL TOLERANCE: ±0.2  
2. ( ) REFERENCE DIMENSION  
3. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

|      |        |             |      |             |                     |  |                                    |              |              |                                                                                       |              |     |  |
|------|--------|-------------|------|-------------|---------------------|--|------------------------------------|--------------|--------------|---------------------------------------------------------------------------------------|--------------|-----|--|
|      |        |             |      |             | DRAWN               |  | TITLE                              | DRAWING NO.  |              |                                                                                       |              |     |  |
|      |        |             |      |             | ME.CHECKED          |  |                                    | MODULE SPEC. | VXTL50BJZ-01 |                                                                                       |              |     |  |
|      |        |             |      |             | EE.CHECKED          |  |                                    |              | UNIT         | mm                                                                                    | SCALE        | FIT |  |
|      |        |             |      |             | APPROVED            |  |                                    |              | 3rd Angle    |  | SHEET 1 OF 1 |     |  |
| V00. |        | First issue |      | 2023.07.22A | CUSTOMER'S APPROVAL |  | Victronix Tecenstar INT'L CO., LTD |              |              |                                                                                       |              |     |  |
| VER. | SYMBOL | AMENDMENT   | SIGN | DATE        |                     |  |                                    |              |              |                                                                                       |              |     |  |